
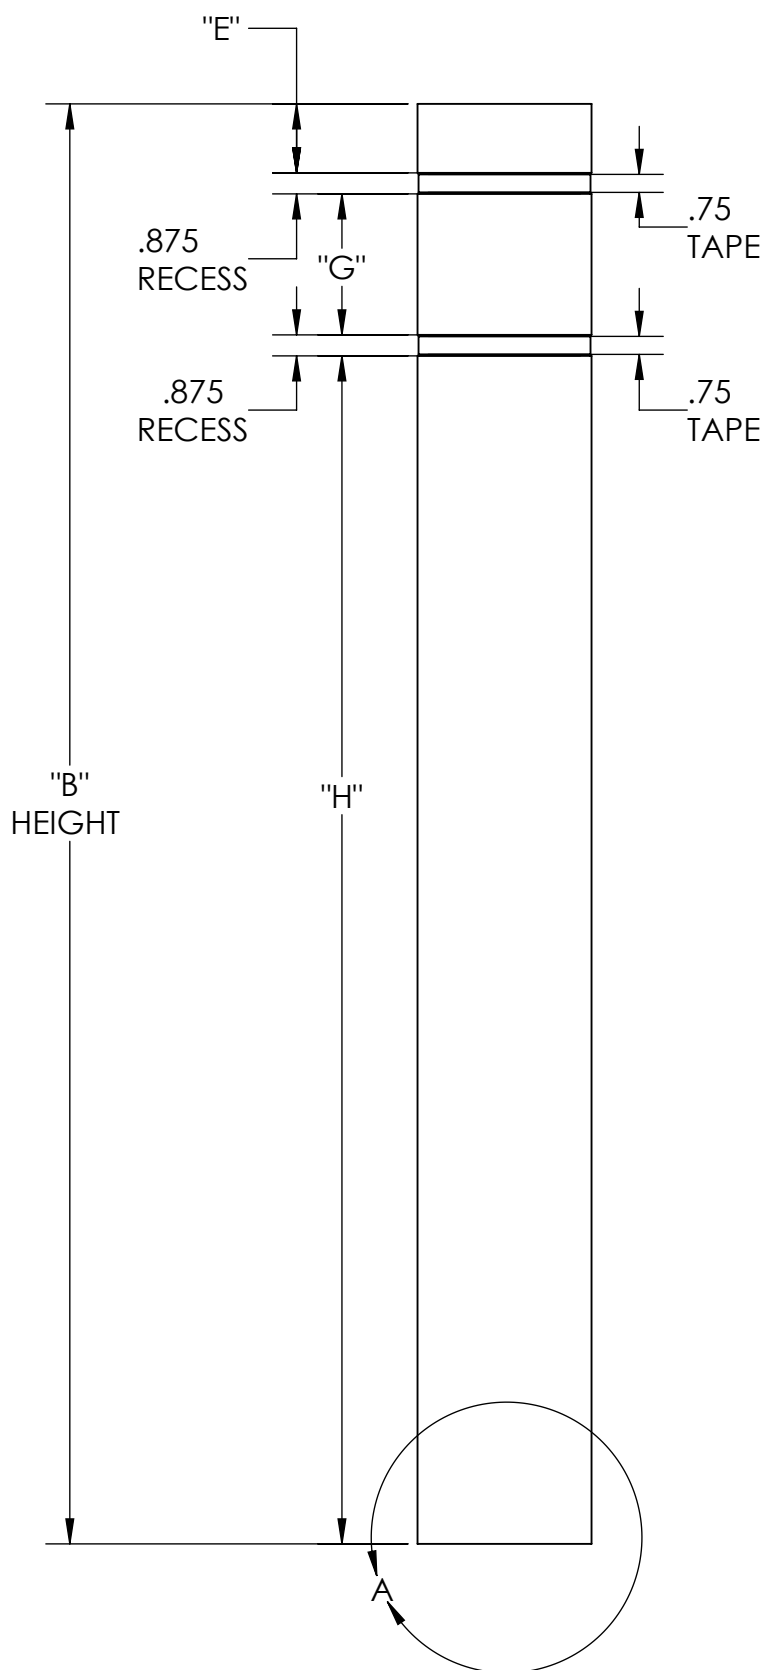


CONFIGURATION TABLE							
SIZE	A	B	C	D	E	G	H
4.5" x 52"	4.72"	52"	.1406"	5.0"	2.875"	5.875"	41.5"
4.5" x 64"	4.72"	64"	.1406"	5.0"	2.875"	5.875"	53.5"
7" x 52"	7.00"	52"	.1719"	7.34"	2.875"	5.875"	41.5"
7" x 60"	7.00"	60"	.1719"	7.34"	2.875"	5.875"	49.5"
7" x 72"	7.00"	72"	.1719"	7.34"	2.875"	5.875"	61.5"
8" x 72" **	8.813"	72"	.19"	9.188"	3.875"	5.75"	60.62"
10" x 60" *	10.875"	60"	.22"	11.313"	3.0"	5.75"	49.5"
12" x 60" *	13.00"	60"	.20"	13.4"	3.0"	5.75"	49.5"

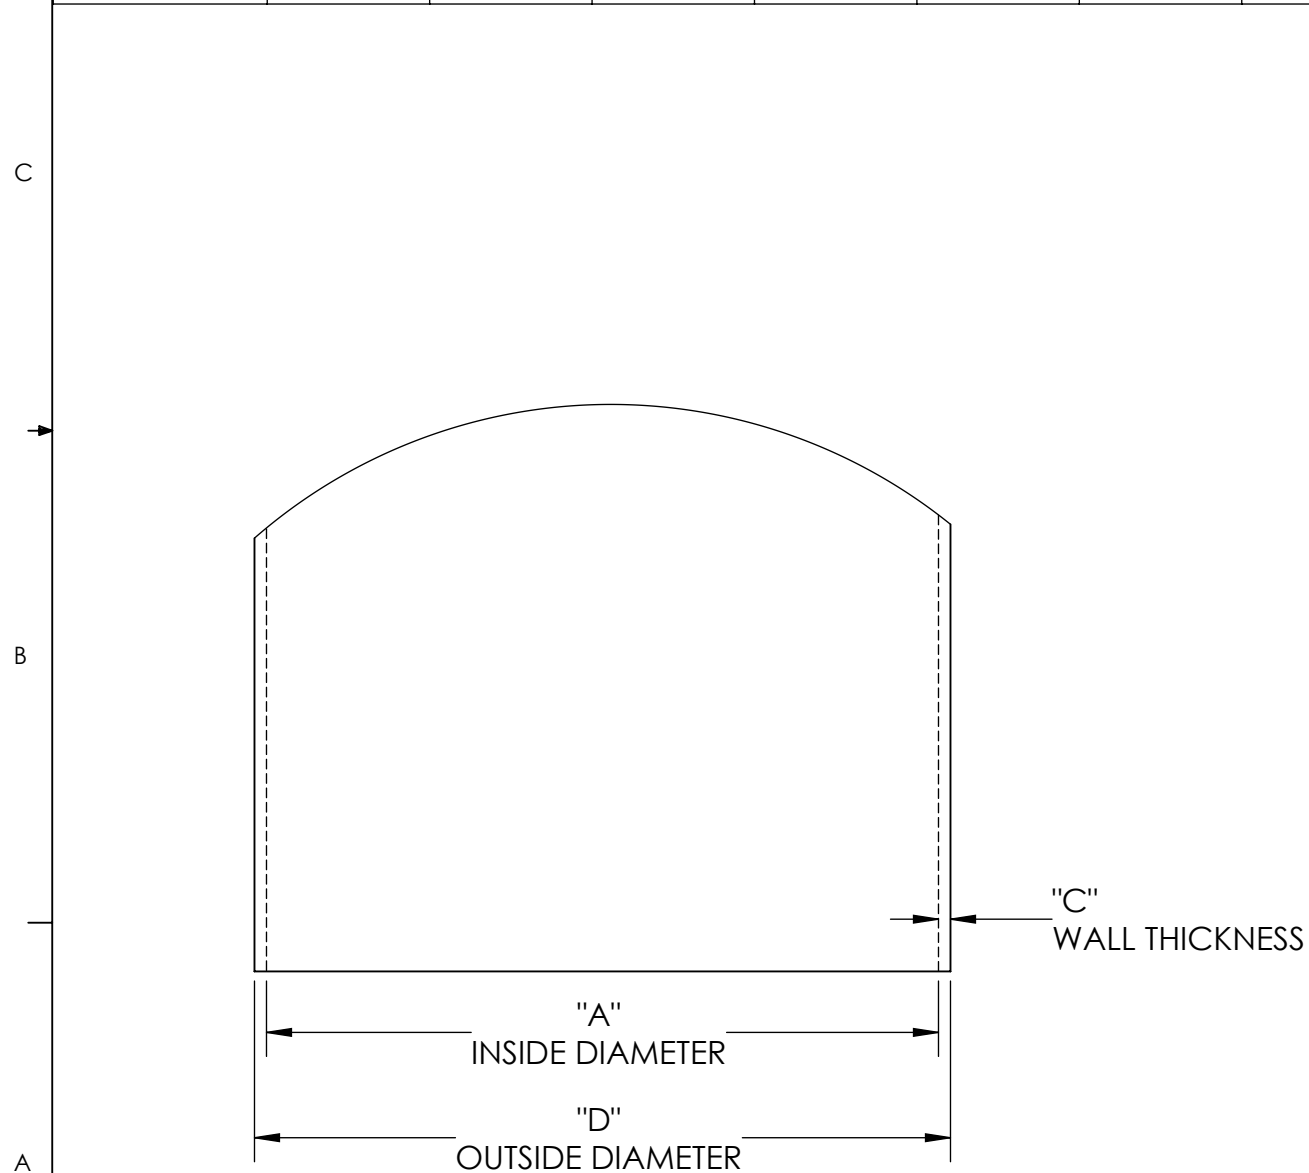

FLAT TOP COVER SPECIFICATION SHEET

MATERIAL:
MARLEX HHM 5502 BN HIGH DENSITY POLYETHELENE.
MICROTHENE MP635662 LINEAR LOW DENSITY POLYETHELENE*

HDPE, HEXENE COPOLYMER, IS TAILORED FOR BLOW MOLDED PRODUCTS THAT REQUIRE EXCELLENT STIFFNESS, IMPACT STRENGTH, AND UV RESISTANCE. HDPE IS DESIGNED FOR AN OPTIMUM BALANCE OF DENSITY, MOLECULAR WEIGHT DISTRIBUTION, DEMONSTRATING MAXIMUM PROPERTY ADVANTAGES FOR LARGE PRODUCTS. BLOW MOLDED HDPE PRODUCTS ARE DURABLE AND RECYCLABLE FOR SUSTAINABILITY. SIX YEAR UV STABILIZER PACKAGE AND ANTI-STATIC PACKAGE ARE COMBINED WITH THE HDPE.

*LOW DENSITY PE, ETHYLENE HEXENE COPOLYMER. LDPE RESIN IS TAILORED FOR ROTATIONALLY MOLDED LARGE HOLLOW OBJECTS THAT REQUIRE IMPACT STRENGTH, WARP RESISTANCE, STRESS CRACK RESISTANCE, AND UV STABILIZATION.

**THE YELLOW COLOR 8-7/8" BOLLARD COVER IS STOCKED IN HDPE. OTHER COLORS MAY BE AVAILABLE IN 8-7/8" HDPE AS THE MARKET DEMANDS.

REFLECTIVE TAPE: HIGH QUALITY REFLECTIVE TAPE
INSTALLATION STRIPS: 2 FOAM STRIPS

- INSTALLATION:**
1. CRISSCROSS THE TWO FOAM STRIPS OVER THE TOP OF THE BOLLARD.
 2. SLIDE THE POST GUARD COVER OVER THE FOAM STRIPS AND THE BOLLAD.

THE BOLLARD SHOP
15310 ENDEAVOR DR
SUITE 200
NOBELSVILLE, IN 46060
317-917-2240

DRAWN	4/2/21	TITLE:	
RELEASED	4/8/21	BOLLARD COVER	
REVISED	TBD		
UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES AND ARE ± .125"			
SIZE	DWG. NO.	REV	
B	PG1	0	
SCALE: NONE			SH 1